

ONE WAY PALLET 1300x1100

Characteristics

- Four way entry.
- Nestable with an increment of 44 mm each.
- Holes to efficient liquid draining.
- Pronounced rounds crossbars to avoid damage in the product.
- Reinforced columns to support static load.
- Won't absorb moisture nor bacteria proliferation.

Material

- High-density Polyethylene (HDPE).
- UV resistance.



 **APPROVED COLOR OPTIONS**

 **REUSABLE**


 **OPTIONAL TRACKING RFID TAG**

Contact

+52 (442) 296-2000

infomexico@rehrig.com

Dimensions in millimeters

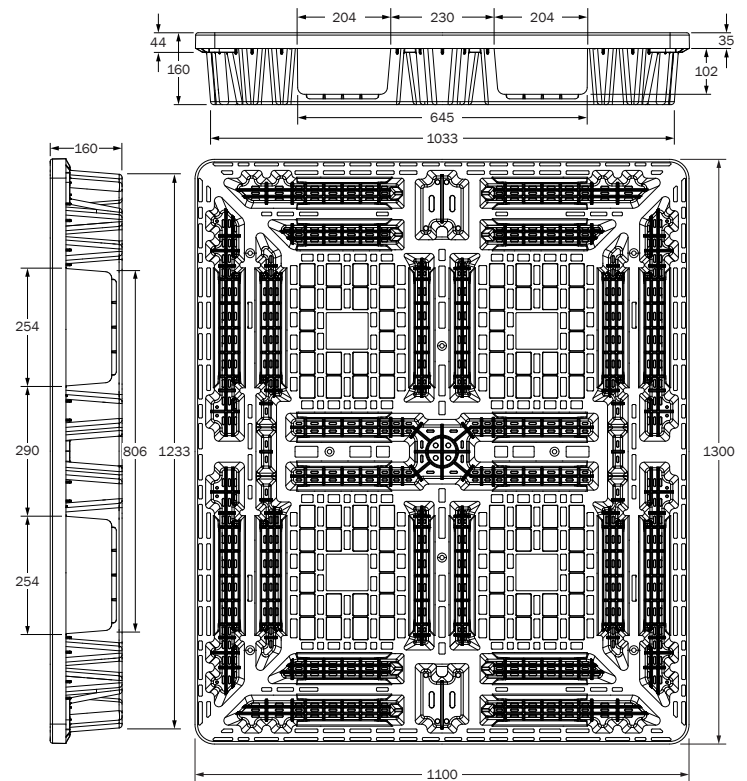

Specifications	in/lb	mm/kg
Length	51.2	1,300
Width	43.3	1,100
Height	6.3	160
Weight	25	11.3
Static load	6,063	2,750
Dynamic load	3,031.4	1,375
Truck load quantity 53'	1,508	

This drawing is property of Rehrig Pacific Company S.A. de C.V. ("Rehrig"). It contains proprietary and confidential information belonging to Rehrig. This drawing is made available to the recipient on the specific condition that neither it, nor the information contained therein will be copied or disclosed by the recipient except for internal review purposes or to obtain technical information from an equipment manufacturer who has been advised of and agrees to be bound by the terms of this agreement. The recipient agrees to immediately return this drawing and all copies thereof upon Rehrig's demand. © 2018 Rehrig Pacific Company.